



Elevator “A” – raise and lower column

The Elevator “A” range is a base hinged fold down column which is raised and lowered by means of a detachable winch. The column can be root or flange mounted and can be assembled on site.



- Can be installed in restricted areas.
- Working at heights is eliminated.
- Safe working operations.
- Ideal for CCTV, floodlighting and telecommunications.



- Manual handling is reduced to raise and lower column.
- Lightweight winch operations.
- Double fail safe systems are located internally and externally.




- On site assembly can be done if access to area by transport is not permitted.
- 3 bolt assembly.



Three door choices can be an option on request:

- Flush door (single/double lock).
- Flush hinge door (double lock).
- Standard lift off door (single/double lock).

Elevator "A" range of raise and lower columns

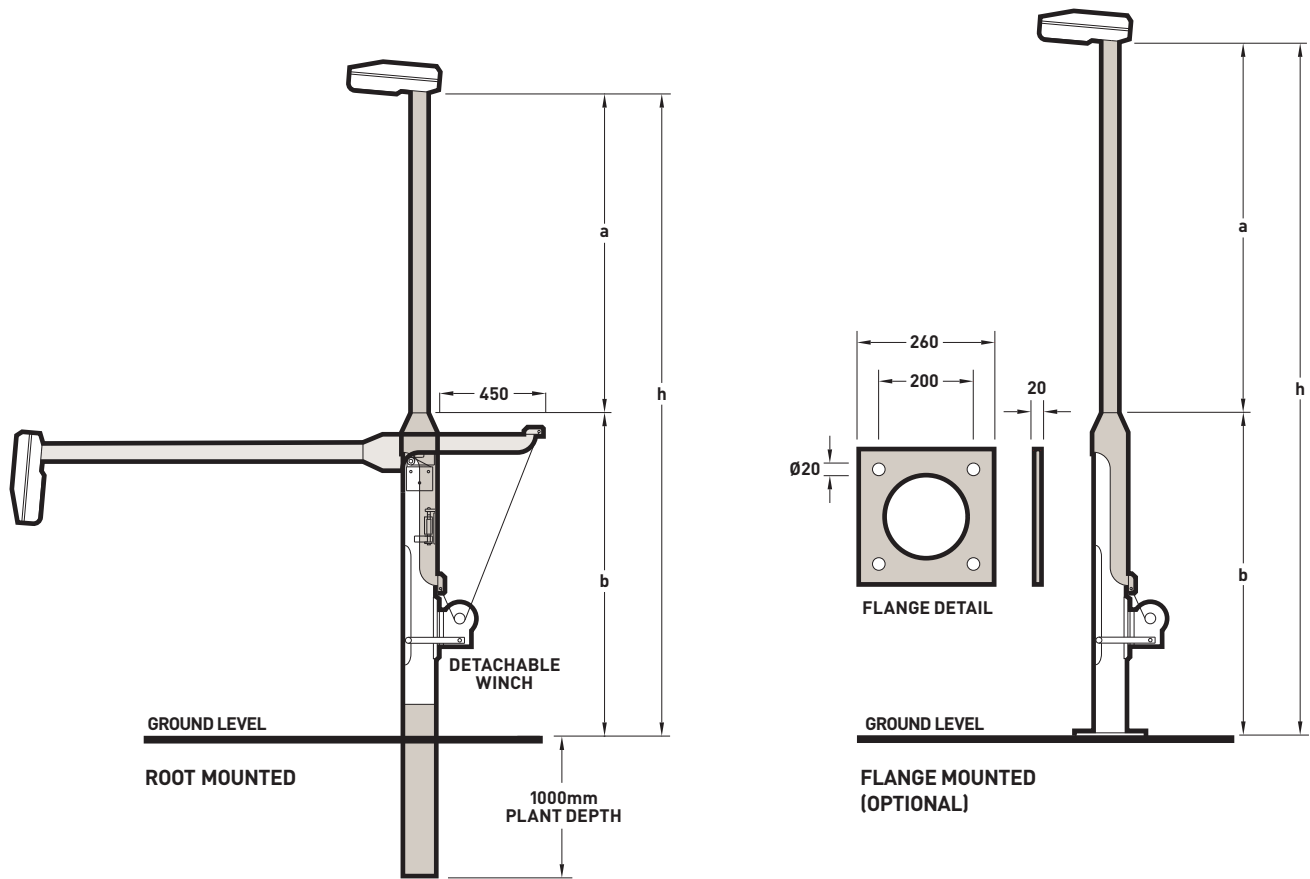

Elevator "A" Range – Specification

Product	Base Type	Nominal Height "h"	Shaft Diameter	Shaft Length "a"	Base Diameter	Base Length "b"	Weight	Max Headload
		mm	mm	mm	mm	mm	kg	kg
ELA5000	ROOT	5000	76.1	3640	140	2250	64	40
ELA5000FP	FLANGE	5000	76.1	3640	140	1250	54	40
ELA6000	ROOT	6000	76.1	4650	140	2250	69	30
ELA6000FP	FLANGE	6000	76.1	4650	140	1250	59	30

Product	Capacity
	kg
EL/WINCH900	900



www.postandcolumn.co.uk

post+column

Post and Column Company Ltd, Road 4, Winsford Industrial Estate, Winsford, Cheshire CW7 3RS
Tel: 01606 550502 Fax: 01606 550857 Email: info@postandcolumn.co.uk